


Dimensions: DIN 87/151-D Straight Pressure Rate: DN40-400 PN 4/DN 500-600 PN 2,5
Size Range: DN 40-DN 600 Temperature: -10...+400 oC Flange Ends: DIN EN 1092
Application: For pipelines for sea cooling water Test: DIN EN 12266

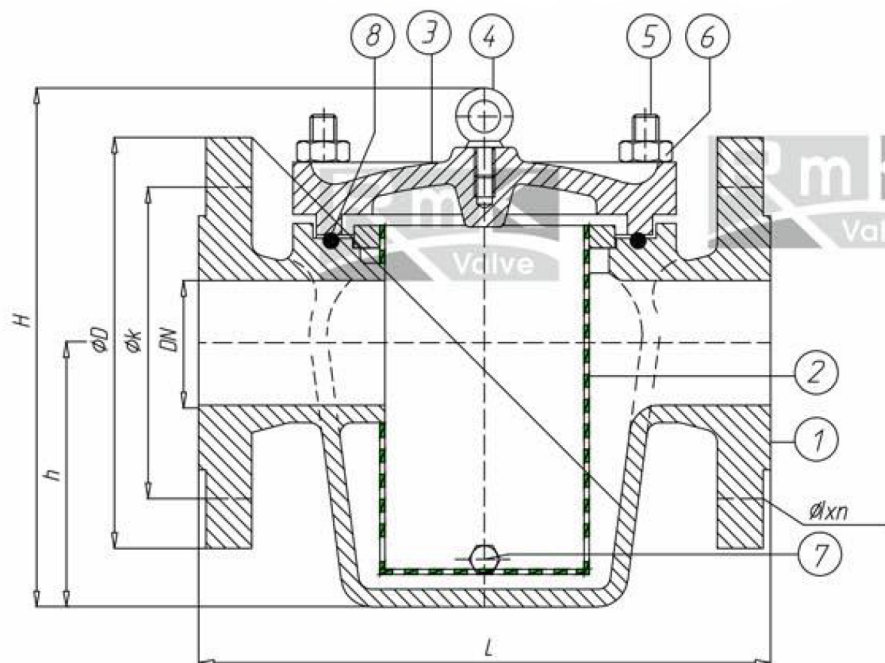

NO	PART NAME	MATERIAL
1	Body	GG-25 / GGG-40 / GS-C 25 / Bronze / SS 304 / SS 316
2	Screen	AISI 304 / AISI 316 / Copper
3	Bonnet	GG-25 / GGG-40 / GS-C 25 / Bronze / SS 304 / SS 316
4	Ring Screw	St / SS
5	Ring Stud	St / SS
6	Nut	St / SS
7	Plug	St / SS / Brass
8	O-Ring	NBR

Nominal Pressure /	PN	PN 4												PN 2,5	
Nominal Diameter	DN	40	50	65	80	100	125	150	200	250	300	350	400	500	600
Valve Dimensions / DIN 87 151 D Straight Type	L	200	230	290	310	350	400	480	600	600	700	800	840	1000	1100
	H	205	225	260	310	345	395	465	565	610	675	790	900	1100	1100
	h	95	106	134	156	185	225	265	335	345	390	425	470	525	670
Flange Dimensions DIN EN 1092 PN 10	D	150	165	185	200	220	250	285	340	400	455	505	565	670	780
	k	110	125	145	160	180	210	240	295	350	400	460	515	620	725
	Øxn	Ø18x4			Ø18x8			Ø22x8		Ø22x12		Ø22x16	Ø26x16	Ø26x20	Ø30x20
Weight		14	19	26	33	45	60	86	147	180	245	325	415	550	815
Flange Dimensions DIN EN 1092 PN 16	D	150	165	185	200	220	250	285	340	400	455	520	580	715	840
	k	110	125	145	160	180	210	240	295	355	410	470	525	650	770
	Øxn	Ø18x4			Ø18x8			Ø22x8	Ø22x12	Ø26x12		Ø26x16	Ø30x16	Ø33x20	Ø36x20
Weight	Kg	14	19	26	33	45	60	86	150	185	250	330	420	560	825