



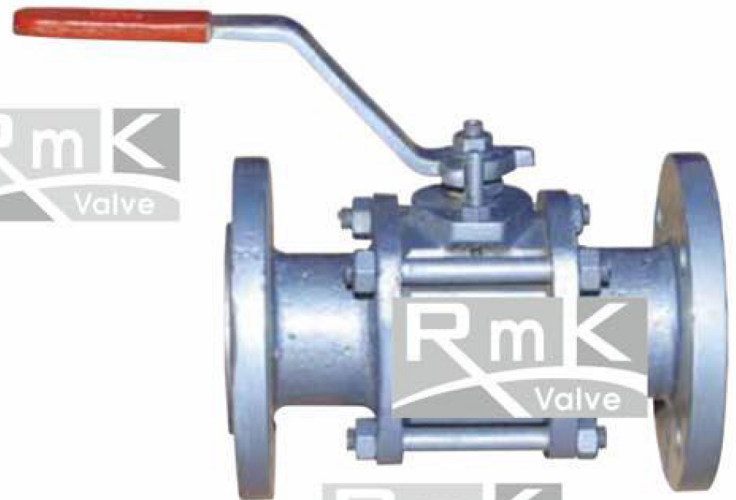

Pressure Rate: PN16-25-40 Size Range: DN15-DN150
Flange Ends: DIN EN 558-1/1 Test: EN 12266

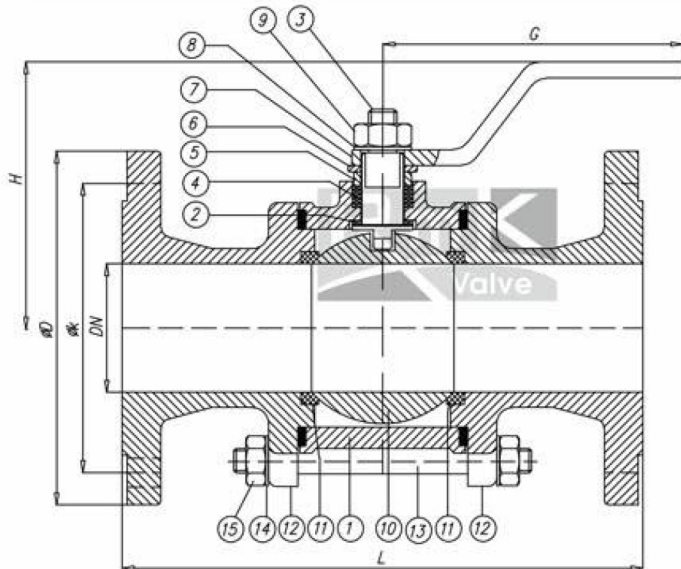

NO	PART NAME	MATERIAL	NO	PART NAME	MATERIAL
1	Body	GG 25 / GGG-40 SS / GS-C 25 / Bronze	9	Nut	5 D/SS
2	Gasket	PTFE	10	Ball	AISI 304 / AISI 316 / Bronze
3	Stem	AISI 304 / AISI 316	11	Seat	PTFE
4	Gasket	PTFE	12	Flange	GG 25 / GGG-40 SS / GS-C 25 / Bronze
5	Gland Bush	Ms 58 / AISI 304	13	Stud	5.6 / SS
6	Stopper	St 37 / AISI 304	14	Washer	St 37 / AISI 304
7	Lever	St 37 / AISI 304	15	Nut	5 D/SS
8	Washer	St 37 / AISI 304			

Nominal Diameter	DN	15	20	25	32	40	50	65	80	100	125	150
Valve Dimensions DIN EN 558-1-1 DIN EN 558-1-1-27 DIN 3357-2	L	130	150	160	180	200	230	290	310	350	400	350
	G max.	160	180	180	250	300	320	350	450	500	700	700
	H max.	95	110	115	130	135	145	155	195	220	265	300
Flange Dimensions DIN EN 1092-1-2 PN 10-16	D	95	105	115	140	150	165	185	200	220	250	285
	k	65	75	85	100	110	125	145	160	180	210	240
Flange Dimensions DIN EN 1092-1-2 PN 25	D	95	105	115	140	150	165	185	200	235	270	300
	k	65	75	85	100	110	125	145	160	190	220	250
Flange Dimensions DIN EN 1092-1-2 PN 40	D	95	105	115	140	150	165	185	200	235	270	300
	k	65	75	85	100	110	125	145	160	190	220	250
Weight	kg	2,3	3,8	4	6,5	8,55	13,55	20,15	29,5	40,3	68	86