


Pressure Rate: PN10-16-150LB Size Range: DN15-DN500
TS 810 / DIN 2501 BS 4504 / ASA 125 / ASA 150

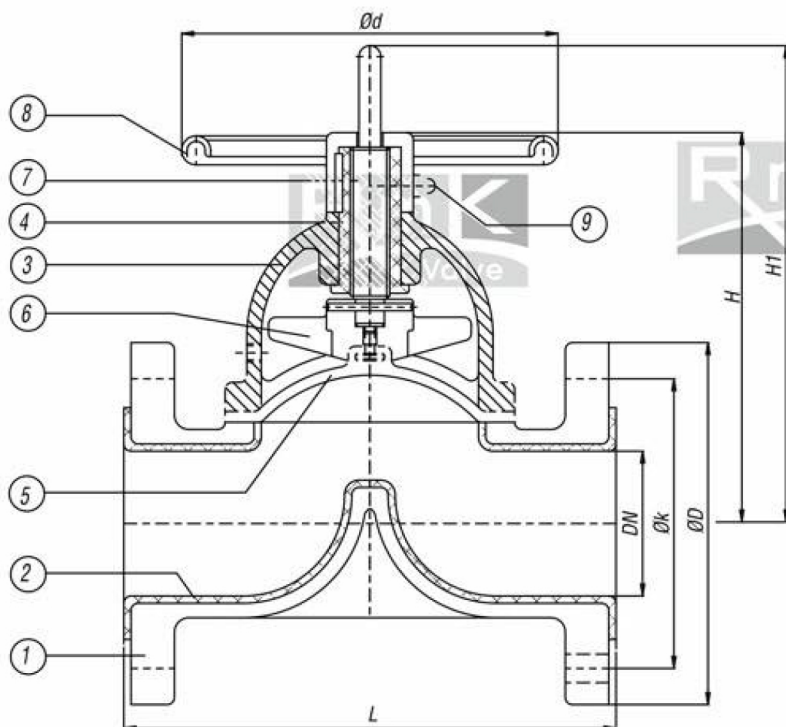

NO	PART NAME	MATERIAL
1	Body	GG 25 / GGG-40 / GS-C 25
2	Rubber	HRL / BL / HL
3	Bonnet	GG 25 / GGG-40 / GS-C 25
4	Bush	Ms 58 / Bronze
5	Membrane	EPDM / BUNA-N
6	Valve Head	GG 25 / GGG-40 / GS-C 25
7	Stem	1,4021 / AISI 304
8	Handwheel	GG 25 / St
9	Oil Nipple	St

Nominal Pressure Nominal Diameter			PN 10 / 16																			
		DN	15	20	25	32	40	50	65	80	100	125	150	200	250	300	350	400	450	500		
Valve Dimensions DIN3202/2-F1 BS 5156		DIN L	130	150	160	180	200	230	290	310	350	400	480	600	730							
		BS L	106	117	127	146	159	190	216	254	305	356	406	521	635	749	921	749	921	921		
		H	75	100	110	125	145	175	195	235	265	320	375	530	630	730	810	775x2	850x2	875x2		
		H1	75	100	110	150	170	205	235	280	330	400	460	645	775	930	1030	975x2	1070x2	1095x2		
		Ød	80		100		120	140	160	200	250	280	320	360	400	500		630	800			
Flange Dimensions DIN 2501 / TS 810 ASA 125 / ASA 150 BS 4504		PN 10	D	95	105	115	140	150	165	185	200	220	250	285	340	395	445	505	565	615	670	
			k	65	75	85	100	110	125	145	160	180	210	240	295	350	400	460	515	565	620	
		PN 16	D	95	105	115	140	150	165	185	200	220	250	285	340	405	460	520	580	640	715	
			k	65	75	85	100	110	125	145	160	180	210	240	295	355	410	470	525	585	650	
			PN 40	D	95	105	115	140	150	165	185	200	235	270	300	375	450	515	580	660	685	755
				k	65	75	85	100	110	125	145	160	190	220	250	320	385	450	510	585	610	670
ASA 125 ASA 150		D	89	99	108	117	127	152,4	178	191	229	254	279,5	343	406	483	533	597	635	698,5		
		k	60	70	79	89	98,5	120,7	139,7	152,4	190,5	216	241,3	298,5	362	432	476,3	539,8	578	635		
Weight		kg	2,5	3	3	6,5	7	9	14	18	26	50	66	130	190	295						