




Nominal Diameter: DN15-DN600 Nominal Pressure: PN10-16-25-40
Ends: DIN EN 558-1-1 / TS 11 494 Dimensions: DIN 3202/2-1-2

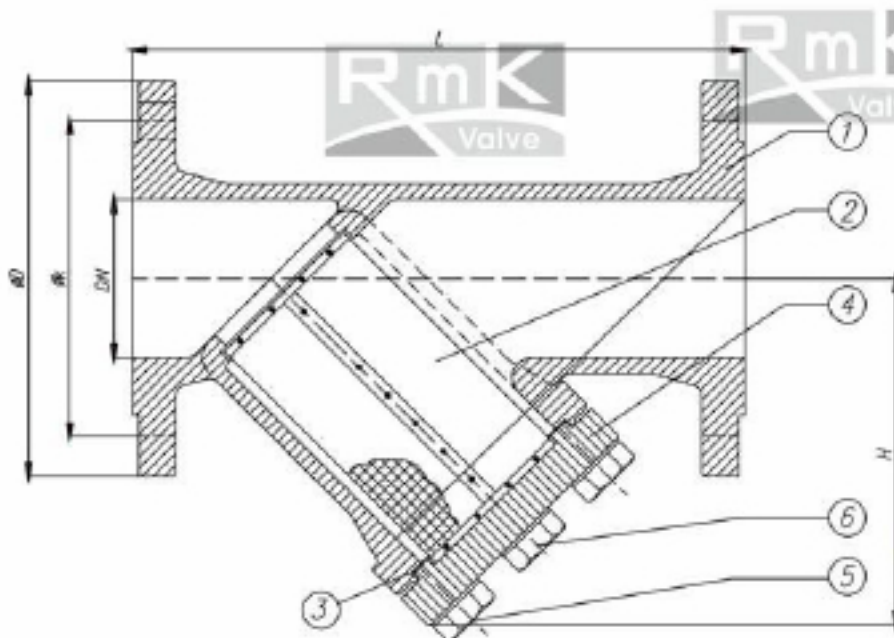

NO	PART NAME	MATERIAL
1	Body	GG 25 / GGG-40 / 50 / GS-C25
2	Filter	AISI 304 / AISI 316
3	Gasket	Kingerit / Franzelit
4	Bonnet	GG 25 / GGG-40 / 50 / GS-C25
5	Bolt	5 D/SS
6	Plug	GG 25 / Ms 58 / SS

Nominal Pressure	PN	PN 10 / 16 / 25 / 40																	
Nominal Diameter	DN	15	20	25	32	40	50	65	80	100	125	150	200	250	300	350	400	500	600
Valve Dimensions DIN3202/2-F1 TS 11 494 DIN EN 558-1/20	L	130	150	160	180	200	230	290	310	350	400	480	600	730	850	980	1100	1250	1450
	H(min)	60	70	80	85	120	135	185	205	245	290	330	390	530	560	620	710	985	1100
	H(max)	100	120	140	150	190	220	310	340	410	470	530	620	850	1050	1100	1210	1700	1900
Plug Dimensions	D1																		
Flange Dimensions DIN EN 1092-1-2 PN10	D	95	105	115	140	150	165	185	200	220	250	285	340	395	445	505	565	670	780
	k	65	75	85	100	110	125	145	160	180	210	240	295	350	400	460	515	620	725
Flange Dimensions DIN EN 1092-1-2 PN16	D	95	105	115	140	150	165	185	200	220	250	285	340	405	460	520	580	715	840
	k	65	75	85	100	110	125	145	160	180	210	240	295	355	410	470	525	650	770
Flange Dimensions DIN EN 1092-1-2 PN25	D	95	105	115	140	150	165	185	200	235	270	300	360	425	485	555	620	730	845
	k	65	75	85	100	110	125	145	160	190	220	250	310	370	430	490	550	660	770
Flange Dimensions DIN EN 1092-1-2 PN40	D	95	105	115	140	150	165	185	200	235	270	300	375	450	515	580	660	755	890
	k	65	75	85	100	110	125	145	160	190	220	250	320	385	450	510	585	670	795
Weight	kg	1.97	2.98	3.7	5.6	7.6	9.8	15.7	24.9	34	43	54	118	177	275	310	418	1100	1300