


Pressure Rate: PN 16 Temperature:

TS 11 494 DIN 3202/2-F1 DN 15 / DN300 BBFT No: 221-300

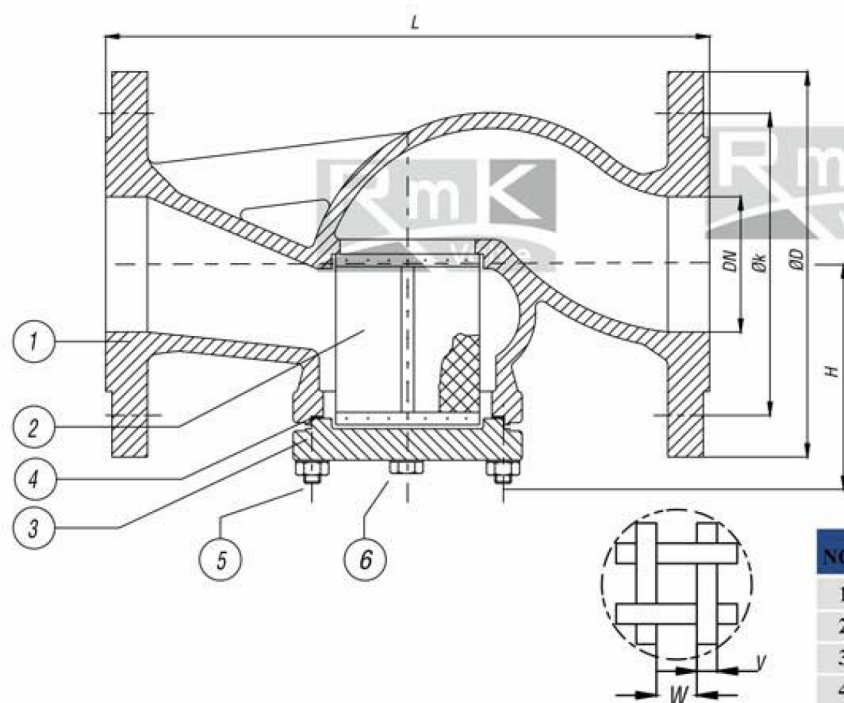

NO	PART NAME	MATERIAL
1	Body	GG 25/GGG-40/50
2	Filter	AISI 304
3	Gasket	Klingerit/Franzelit
4	Bonnet	GG 25/GGG-40/50
5	Bolt	5 D/SS
6	Plug	GG 25/Ms 58/SS

Nominal Pressure	PN	16														
Nominal Diameter	N	15	20	25	32	40	50	65	80	100	125	150	200	250	300	
Valve Dimensions TS 11494 DIN3202/2-F1	L	130	150	160	180	200	230	290	310	350	400	480	600	730	850	
	H(min)	75	75	85	90	95	100	135	145	170	205	225	270	290	360	
	H(max)	115	125	150	160	170	185	250	280	330	385	400	500	580	700	
Mash	Ba	52	62	72	77	97	112	168	188	218	243	281	317	485	520	
	S	25	25	29	38	50	60	65	85	105	130	160	210	260	310	
	v	0,35				0,40				0,50						
	W	0,65				0,85				0,93						
Plug Dimensions	D1							R7/8"								R1"
Flange Dimensions TS 810 / DIN 2501 PN 6	D	80	90	100	120	130	140	160	190	210	240	265	320	375	400	
	k	55	65	75	90	100	110	130	150	170	210	225	280	335	395	
Flange Dimensions TS 810 / DIN 2501 PN 10	D	95	105	115	140	150	165	185	200	220	250	285	340	395	445	
	k	65	75	85	100	110	125	145	160	180	210	240	295	350	400	
Flange Dimensions TS 810 / DIN 2501 PN 16	D	95	105	115	140	150	165	185	200	220	250	285	340	405	460	
	k	65	75	85	100	110	125	145	160	180	210	240	295	355	410	
Weight	kg	1,97	2,98	3,7	5,6	7,6	9,8	15,7	24,9	34	43	54	118	177	275	