



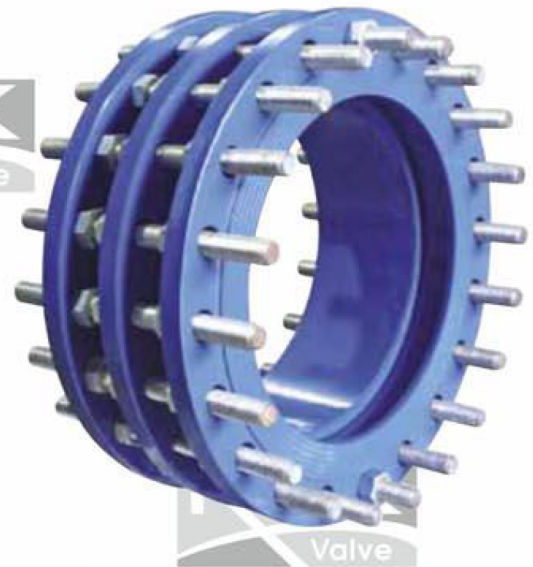

Pressure Rate: PN10-16-25 Size Range: DN100-DN1200
Flange Ends: DIN, ANSI, JIS Test: EN 12266

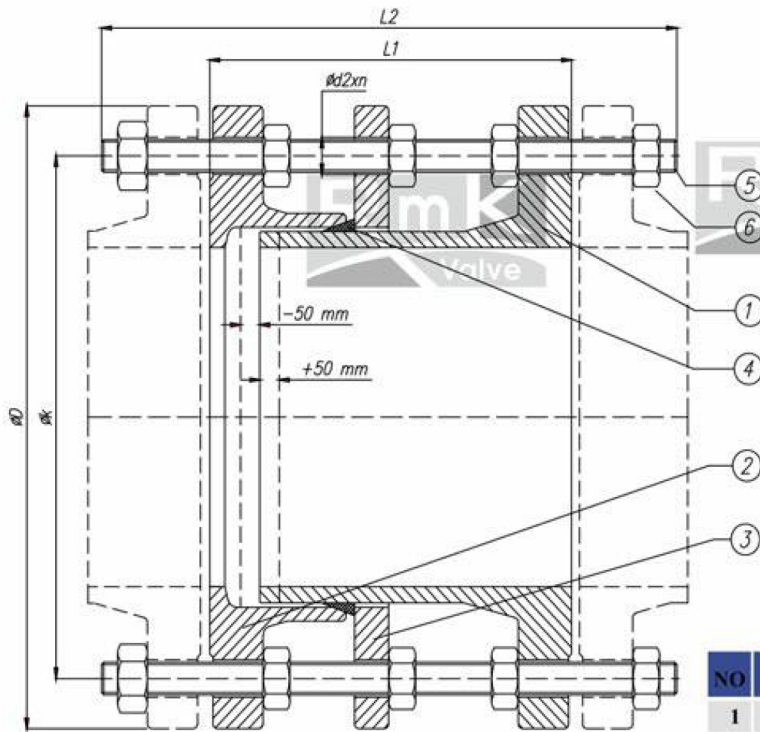

NO	PART NAME	MATERIAL
1	Flange Pipe-Long	GGG-40
2	Flange Pipe-Short	GGG-40
3	Retainig Flange	GGG-40
4	Sealing Ring	EPDM/NBR
5	Stud Bold	Ck-40(Gal. Zn)
6	Nut	Ck-40(Gal. Zn)

Nominal Diameter		DN	100	125	150	200	250	300	350	400	450	500	600	700	800	900	1000	1100	1200	1300	1400	1500		
Valve Dimensions		L1	200			220			230		250	260			290			300	320	340	360	380		
		L2	310		320	340	360			370	390	400	410		460		480		520	560	580	590		
		L1	200			220	230	250	260	270		280	300		320		340		360	380		400		
		L2	340	370		370	410		480			500	540	560	600	630	660		600	630		700		
Flange Dimensions		PN 10	ØD	220	250	285	340	400	455	505	565	615	670	780	895	1015	1115	1230	1430	1455	1575	1675	1785	
			Øk	180	210	240	295	350	400	460	515	565	620	725	840	950	1050	1160	1270	1380	1490	1590	1700	
			Ød2Xn	Ø18x8		Ø22x8		Ø22x12		Ø22x16		Ø26x16		Ø26x20		Ø30x20	Ø30x24	Ø33x24	Ø33x28	Ø36x28	Ø36x32	Ø38x32	Ø42x32	Ø42x36
		BS 4504 DIN EN 1092-1/2	PN 16	ØD	220	250	285	340	400	455	520	580	640	715	840	910	1025	1125	1255	1355	1485	1590	1685	1820
Øk	180			210	240	295	355	410	470	525	585	650	770	840	950	1050	1170	1280	1390	1490	1590	1710		
Ød2Xn	Ø18x8			Ø22x8	Ø22x12	Ø26x12		Ø26x16		Ø30x16	Ø30x20	Ø33x20	Ø36x20	Ø36x24	Ø38x24	Ø39x28	Ø42x28	Ø42x32	Ø48x32		Ø48x36	Ø55x36		
Weight		kg	20	23	32	46	57	78	102	128	135	200	305	365	410	540	700	820	1120	1210	1310	1480		